




Telephone Transceiver

Removal and Installation

1. Disconnect battery ground cable (14301). Refer to «Section 14-01».
2. Disconnect wire harness connectors from mobile telephone transceiver (19A387).
3. Disconnect multi-function control antenna cable (19A397) from mobile telephone transceiver.
4. Remove retaining nut.
5. Remove package tray trim panel (46668) and remove two retaining nuts.
6. Remove mobile telephone transceiver assembly.
7. To install, reverse Removal procedure.

Mobile Telephone Transceiver

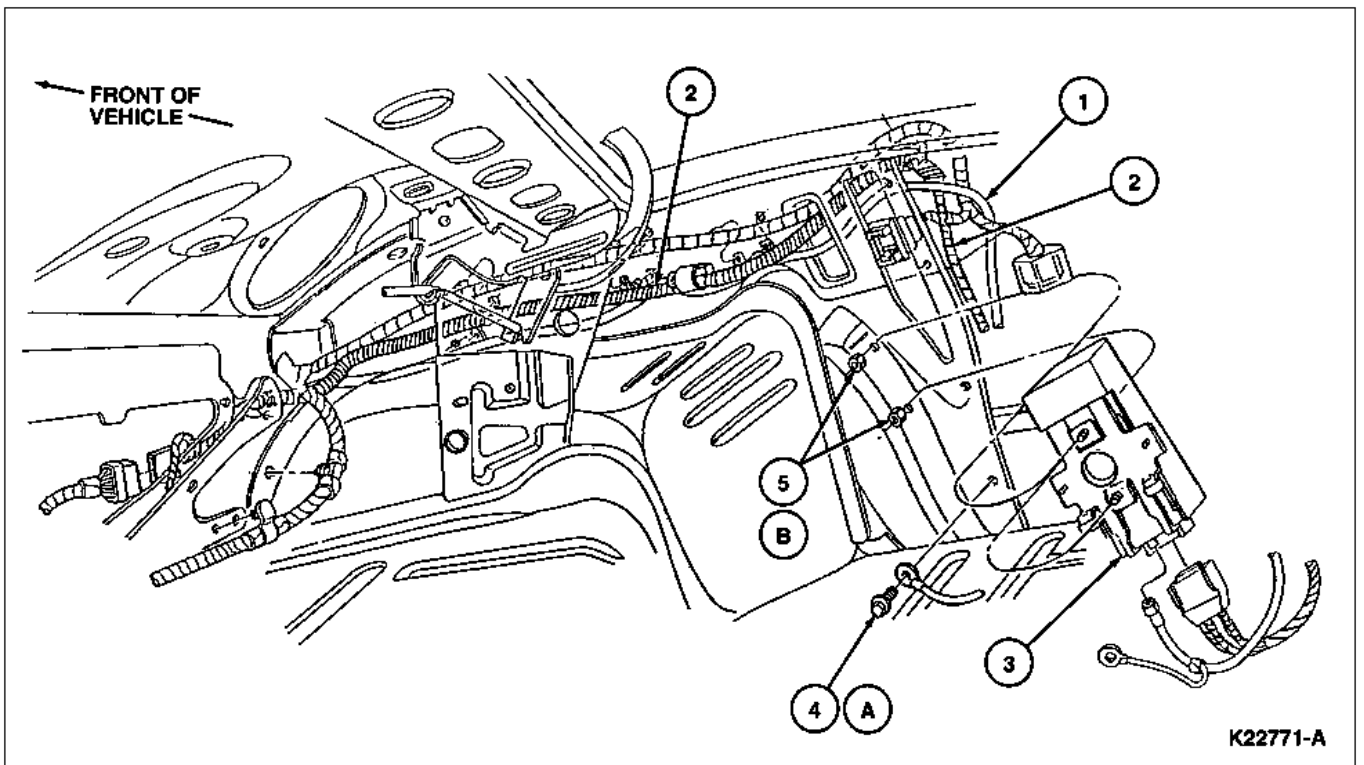

Item	Part Number	Description
1	19A397	Multi-Function Control Antenna Cable

2	14A005	Body Main Wiring
3	19A387	Mobile Telephone Transceiver and Bracket Assy
4	N806327-S36MG	Battery Ground Screw
5	N621906-S2	Nut (2 Req'd)
A	--	Tighten to 9.0-10.4 N-m (80-92 Lb-In)
B	--	Tighten to 12.0-13.8 N-m (106-122 Lb-In)
